

Roller Assembly 549AS10



BARBER

New For 2000

Introducing Our New Roller Series

At BARBER, we are continually improving our equipment by adding new technology and higher quality components. The 549AS10 Roller Assembly is only one of the many new improvements that will be seen on all of our products in the new millennium.



549AS10 Roller Assembly

- **Longer Lasting**
- **Adjustable**
- **Greasable**




See back for details...

1. Our new improved Roller Assemblies are greasable and can be accessed easily from outside of the machine.

2. They have an increased diameter that allows for a greater wearing surface.

3. Their increased width supports both side links of each chain. This adds greater support and allows the chain to run more smoothly.

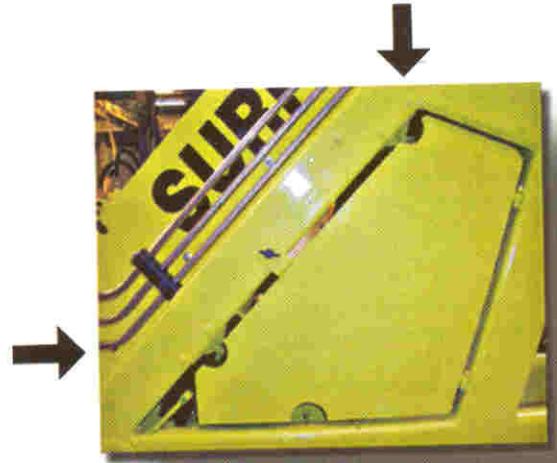

4. They are interchangeable with all old roller. The new Roller Assemblies can be attached using the same nuts, bolts and lock washers for fastening to the side frame. Small adjustments to the side shield may be necessary to make room for the grease fitting.



5. Most importantly, the new Roller Assemblies are designed with adjustable internal components to reduce internal wear. To adjust the Roller Assembly:

- a. Remove Roller Assembly from machine**
- b. Remove outer snap ring and outer cover**
- c. Remove inner snap ring**
- d. Add required shims. Make sure roller turns freely. Do not over-tighten**
- e. Reassemble and grease as required**

*** Improved Roller Assemblies can also be retrofitted to all existing machines.**

Tel: 203.729.9000

H. Barber & Sons, Inc.

Fax: 203.729.4000

15 Raytkwich Dr. Naugatuck, CT 06770 USA Email: hbarber@hbarber.com Website: www.hbarber.com

[549A510 Roller Assembly 061700]